



*Fixed Position Cage
Coil on Steel Pallet*

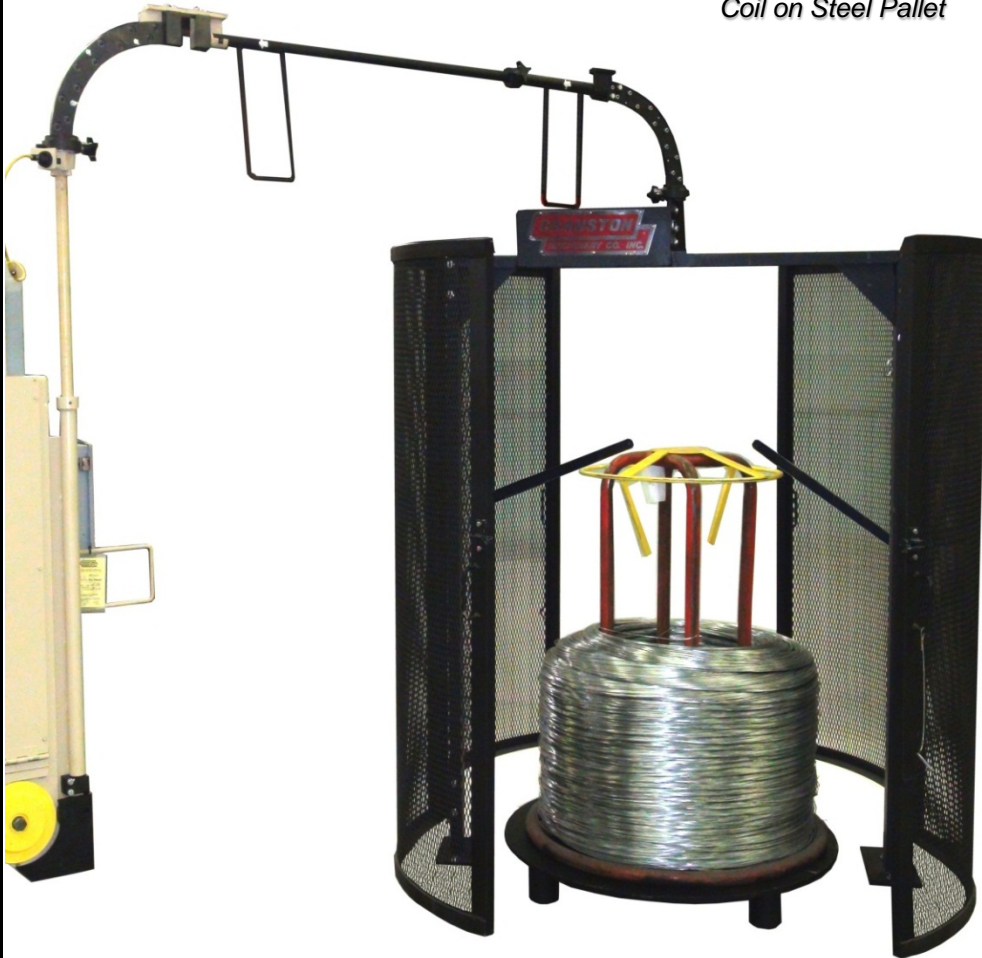

*Cage and Coil on Floor
No pallet*

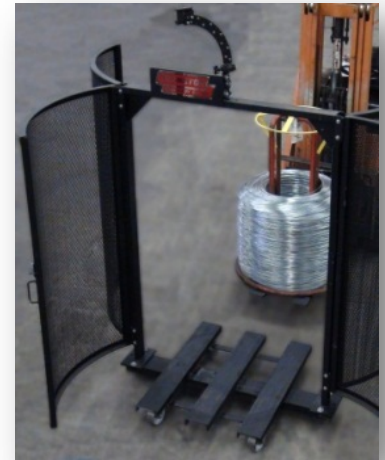

Cage and Coil on Casters



EZ Thread Wire Coil Cage System

- *New EZ thread system makes wire threading Safer, Easier and Faster!*
- *Designed for Bale, Stack and Unit wire!*
- *Total wire containment!*
- *Options for fixed or portable applications!*
- *Provides enhanced operator access at rear of strapping machine!*

Standard on all Cranston Bale Strappers, Stack Strappers and Unitizers

The EZ thread system includes:

- Tapered guides that allow simple pushing of the wire into the receiver opening.
- Quick release adjustable wire straightening wheel for breaking the wire cast,
- An adjustable gooseneck with anti-friction corners
- Telescoping cross tube for flexible positioning of cart.


Specifications

- Standard package includes the primary frame, double door cage, two anti-fouling arms, payoff ring, Gooseneck and cross bar.
- System is sandblasted, primed and painted Black enamel.
- Weight (approximately): 295KG (650 LB)
- Wire Diameter: 3.14mm (10.75awg) to 1.83mm (15awg)
- Coil Size: 890mm (35") max. OD x 1016mm (40") max height

Requirements:

- Smooth operating floor for units with casters.
- Wire Strapper equipped with Cranston's EZ Thread system.
- Assembly is required.


Retrofit kits are available for most existing strapping machines.

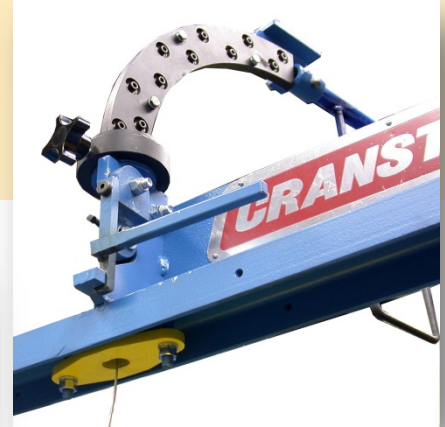

Quick release wire straightener and anti-friction Gooseneck



Loading a full wire stand onto the steel pallet can be accomplished by forks, or overhead hoist

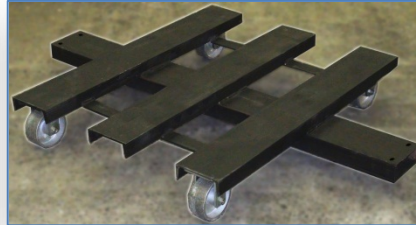

Caster kit for the Cage and Coil includes Fork Slots and Heavy duty, large diameter, iron casters (2 fixed and 2 swivel).



Optional Pipe Stand

**FOR FURTHER DETAILS CONTACT:
Cranston Machinery Co., Inc.**

2251 SE Oak Grove Blvd., Oak Grove, OR. 97267
Phone: 503-654-7751 Fax: 503-654-6172

www.cranston-machinery.com

All products and services are covered by Cranston standard terms and conditions, including limits of liability and warranty effective at the time of sale. Available upon request.



Technical Specification T036 120612